



KOOLZONE

MOBILE SPOT COOLER

A PORTABLE STREAM OF AIR FOR INDOOR AND OUTDOOR USE



SAC - 1800

N407 - TC

SAC - 3000

SAC - 4500

SAC - 6500

UNINEX INTERNATIONAL IS THE MASTER DISTRIBUTOR IN ALL OF NORTH AMERICA
FOR KOOLZONE MOBILE SPOT COOLERS / AIR CONDITIONERS



UNINEX INTERNATIONAL

5780 SMITHWAY STREET COMMERCE, CA 90040

T. 800-864-3288 / 323-890-9246 / F. 323-890-9249



KOOLZONE MOBILE SPOT COOLER

INDOOR



OUTDOOR

COOLING CAPACITY
6,293 BTU

PROVIDE A BREEZE IN ANY ENVIRONMENT
SAC-1800



SAC - 1800

- Industrial grade, ETL certified, reliable and safe, 6,293 BTU, CER 9.55
- R410A refrigerant (contains no ozone depleting R22 refrigerant which has been banned by the U.S. EPA in new equipment after January 1, 2010)
- Energy efficient, 1/2 ton cooling capacity, noise level: 60 - 62 db
- Built-in dehumidifier and condensation tank
- Minimal assembly required
- Mobile spot coolers are suitable for indoor/outdoor use





STAY COMFORTABLE WITH
VERSATILE SPOT COOLERS



LARGE COVERAGE AREA, COLD WIND

OPTIMUM OPERATING TEMPERATURE

64°F - 104°F

EFFECTIVE AREA

77 SQ FT

POWERFUL
COOLING

SAC-1800

PRODUCT FEATURES



ROTATABLE
COOLING AIR DUCT

Cooling air duct can be rotated 360 degrees for broader cold dehumidified air coverage.



AIR FILTER
REMOVABLE/WASHABLE

Removable and washable filter allows for easy replacement, and maintenance.



FLEXIBLE DUCT

Flexible duct can be adjusted to desired directions.



SIZE/WEIGHT

18.7"(W) x 10.4"(D) x 24"(H) / 51 lbs.
Cool air duct diameter: 4.7" (in).



CONDENSATION
TANK 0.8(GAL)

CONDENSATION TANK (0.8 GAL)

Collects and stores water from unit's dehumidifier.



EXHAUST FAN

EXHAUST FAN

Heated exhaust air is directed horizontally for convenient placement.

KOOLZONE MOBILE SPOT COOLER

INDOOR  OUTDOOR

COOLING CAPACITY
8,920 BTU

PROVIDE A BREEZE IN ANY ENVIRONMENT
N407-TC

N407 - TC

- Industrial grade, ETL certified, reliable and safe, 8,920 BTU, CER 9.22
- R410A refrigerant (contains no ozone depleting R22 refrigerant which has been banned by the U.S. EPA in new equipment after January 1, 2010)
- Energy efficient, 0.7 ton cooling capacity, built-in dehumidifier and condensation tank
- [Certification]: meets CAER Title 20, Section 1607 requirements, listed on California Energy Commission/MAEDBS for test ASHRAE Standard 128-2001
- No assembly required
- Mobile spot coolers are suitable for indoor or outdoor use



STAY COMFORTABLE WITH
VERSATILE SPOT COOLERS



LARGE COVERAGE AREA, COLD WIND

OPTIMUM OPERATING TEMPERATURE

64°F - 104°F

EFFECTIVE AREA

107 SQ FT

POWERFUL COOLING

N407-TC

PRODUCT FEATURES



COOLING AIR DUCT

Cooling air duct can oscillate up to 75 degrees, or remain stationary for more cold dehumidified air coverage.



FRONT AIR INTAKE

Removable and washable filter allows for easy replacement, and maintenance.



FLEXIBLE DUCT

Flexible duct can be adjusted to desired directions.



SIZE/WEIGHT

15.7"(W) x 16.9"(D) x 32.3"(H) / 88 lbs.



CONDENSATION TANK (1.3 GAL)

Collects and stores water from unit's dehumidifier.
(Drain hose included).



AIR VOLUME CONTROL WITH ON/OFF OSCILLATION SWITCH

2-Speed air volume control with an ON/OFF oscillation switch. Offers different air flow options.

KOOLZONE MOBILE SPOT COOLER

INDOOR



OUTDOOR

COOLING CAPACITY
10,236 BTU

PROVIDE A BREEZE IN ANY ENVIRONMENT
SAC-3000

SAC - 3000

- Industrial grade, ETL certified, reliable and safe, 10,236 BTU
- Runs with 110V, 10A. R410A refrigerant (contains no ozone depleting R22 refrigerant which has been banned by the U.S. EPA in new equipment after January 1, 2010)
- Built-in dehumidifier and condensation tank
- Twin flexible ducts – adjust the duct angle to a desired position, front Intake design allows convenient placement near a wall
- Units can be placed where your existing fans are located, portable and affordable, manageable units versus larger bulkier non-movable units
- Minimal assembly required
- Mobile spot coolers are suitable for indoor or outdoor use





STAY COMFORTABLE WITH
VERSATILE SPOT COOLERS



LARGE COVERAGE AREA, COLD WIND

OPTIMUM OPERATING TEMPERATURE

64°F - 104°F

EFFECTIVE AREA

160 SQ FT

POWERFUL
COOLING

SAC-3000

PRODUCT FEATURES



COOLING AIR DUCT

Cooling air duct can be rotated 360 degrees for broader cold dehumidified air coverage.




FRONT AIR INTAKE

Removable and washable filter allows for easy replacement, and maintenance.



FLEXIBLE DUCT

Flexible duct can be adjusted to desired directions.

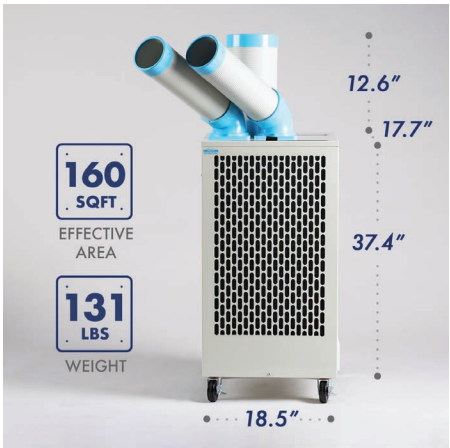

SIZE/WEIGHT

18.5"(W) x 17.7"(D) x 37.4"(H) / 131 lbs.
Exhaust duct diameter: 7"(in).
Cool air duct diameter: 5"(in).



CONDENSATION TANK (1.3 GAL)

Collects and stores water from unit's dehumidifier.
(Drain hose included).



AIR VOLUME CONTROL

2-Speed air volume control.
Offers different air flow options.



KOOLZONE MOBILE SPOT COOLER

INDOOR



OUTDOOR

COOLING CAPACITY


15,217 BTU

PROVIDE A BREEZE IN ANY ENVIRONMENT

SAC-4500

SAC - 4500

- Twin duct with oscillating function, industrial grade, ETL certified, 15,217 BTU, CER 9.88, reliable and safe
- Runs with 110V and require 20 amp breaker. R410A refrigerant (contains no ozone depleting R22 refrigerant which has been banned by the U.S. EPA in new equipment after January 1, 2010)
- 95 degree cool duct swinging angle (oscillation), NEMA Plug type 5-20P (20A, 125V), energy efficient, 1.3 ton cooling capacity, built-in dehumidifier and condensation tank
- Units can be placed where your existing fans are located, portable and affordable, manageable units versus larger bulkier non-movable units
- [Certification]: meets CAER Title 20, Section 1607 requirements, listed on California Energy Commission/MAEDBS for test ASHRAE Standard 128-2001
- Minimal assembly required
- Mobile spot coolers are suitable for indoor or outdoor use



STAY COMFORTABLE WITH VERSATILE SPOT COOLERS



LARGE COVERAGE AREA, COLD WIND

OPTIMUM OPERATING TEMPERATURE

64°F - 104°F

EFFECTIVE AREA

190 SQ FT

POWERFUL COOLING

SAC-4500

PRODUCT FEATURES



95°
OSCILLATION
AIR DUCT

OSCILLATING COOLING AIR DUCT

COOLING AIR DUCT

Two oscillating ducts for up to 95 degrees coverage.
Exhaust heat is expelled through the top of the unit.



AIR FILTER
REMOVABLE/WASHABLE

FRONT AIR INTAKE

Removable and washable filter allows for easy
replacement, and maintenance.



FLEXIBLE DUCT

FLEXIBLE DUCT

Flexible duct can be adjusted to
desired directions.



190
SQFT
EFFECTIVE
AREA

161
LBS
WEIGHT

13.2"

43.3"

20.5" 18.5"

SIZE/WEIGHT

20.5"(W) x 18.5"(D) x 43.3"(H) / 161 lbs.



CONDENSATION TANK DRAIN HOSE INCLUDED

CONDENSATION TANK (2.4 GAL)

Collects and stores water from unit's dehumidifier.
(Drain hose included).



AIR VOLUME CONTROL WITH SWITCH

AIR VOLUME CONTROL WITH ON/OFF OSCILLATION SWITCH

2-Speed air volume control with an ON/OFF
oscillation switch. Offers different air flow options.



KOOLZONE MOBILE SPOT COOLER

INDOOR



OUTDOOR

COOLING CAPACITY


23,053 BTU

PROVIDE A BREEZE IN ANY ENVIRONMENT

SAC-6500

SAC - 6500

- Flexible triple ducts can be adjusted to desired positions, Industrial grade, ETL certified, Reliable and safe, 220V required, NEMA Plug type 6-15P (15A, 250V), 23,053 BTU, CER 9.41
- R410A Refrigerant (Contains no ozone depleting R22 refrigerant which has been banned by the U.S. EPA in new equipment after January 1, 2010), built-in dehumidifier and condensation tank
- Information about the DIGITAL TEMPERATURE CONTROL BOARD:
 1. DIGITAL TEMPERATURE GAUGE – Allows the temperature to be set to a specific Fahrenheit degree
 2. POWER SWITCH – Allows on/off power to unit
 3. WIND VOLUME CHOICE - Sets fan speed high or low (small square for low, large square for high)
 4. ALARM INDICATOR LAMPS – Will light up once the condensation tank has reached capacity
 5. AIR-OUT TEMPERATURE SETTING – this button allows the temperature coming out of the three cooling ducts to be set at a particular Fahrenheit degree by the digital temperature gauge
 6. INLET TEMPERATURE SETTING – This button controls the room temperature once set by the digital temperature gauge. The room air circulation is maintained through the air intake and the temperature gauge setting
- Minimal assembly required
- Mobile spot coolers are suitable for indoor or outdoor use

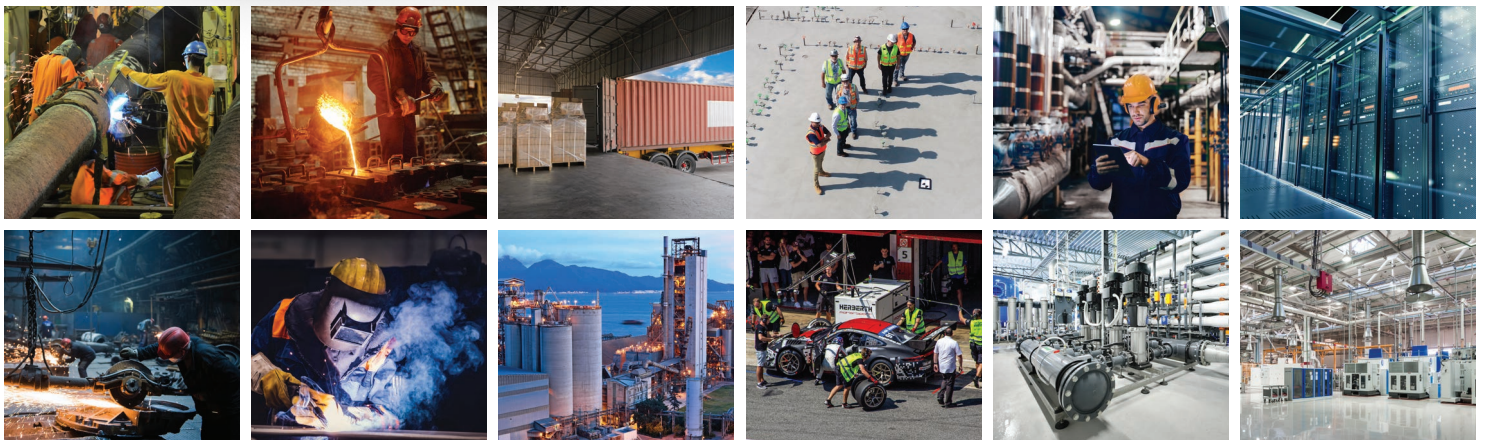

STAY COMFORTABLE WITH
VERSATILE SPOT COOLERS

LARGE COVERAGE AREA, COLD WIND

OPTIMUM OPERATING TEMPERATURE

64°F - 104°F

EFFECTIVE AREA

280 SQ FT

POWERFUL
COOLING

SAC-6500

PRODUCT FEATURES

COOLING AIR DUCT



COOLING AIR DUCT

Three stationary ducts for more dehumidified air coverage.

AIR FILTER REMOVABLE/WASHABLE



FRONT AIR INTAKE

Removable and washable filter allows for easy replacement, and maintenance.

FLEXIBLE DUCT



FLEXIBLE DUCT

Flexible duct can be adjusted to desired directions.



SIZE/WEIGHT

22"(W) x 24.4"(D) x 50"(H) / 218 lbs.
Cool air duct diameter: 5"(in).

CONDENSATION TANK DRAIN HOSE INCLUDED



CONDENSATION TANK (6.6 GAL)

Collects and stores water from unit's dehumidifier.

DIGITAL TEMPERATURE CONTROL



DIGITAL TEMPERATURE CONTROL

Digital Temperature Control with auto shut-off.



MAKE LIFE SIMPLE AND MORE CONVENIENT
WITH UNINEX



SCAN ME

CONTACT US FOR RENTAL OR PURCHASE

UNINEX INTERNATIONAL

5780 SMITHWAY STREET COMMERCE, CA 90040
T. 800-864-3288 / 323-890-9246 / F. 323-890-9249